



WIDE SMARTLIFT[®]

INGROUND LIFT

10,000 lbs. & 12,000 lbs. CAPACITIES



Be ready to service the next generation of vehicles with a lift designed to service battery electric, exotic, and standard vehicles.

THE FUTURE LOOKS WIDE




Future proof your business with Rotary's most versatile lift yet.

The WIDE SMARTLIFT® inground lift combines a wide stance with versatile features only Rotary can offer. It's specifically designed to service electric vehicles, exotics and even standard vehicles.

Available in 10,000 lbs. and 12,000 lbs. capacities.

2
18%
greater reach for faster, easier spotting with TRIO™ three-stage arms

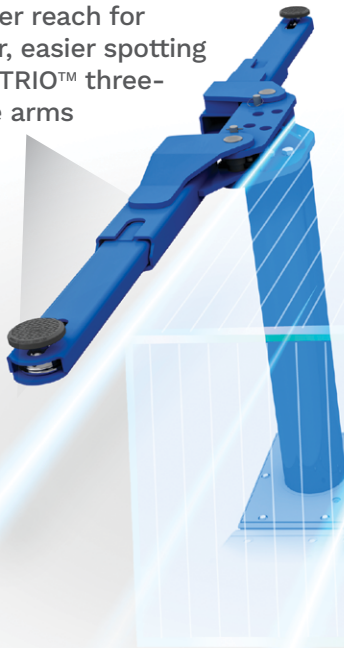


Get 1.5X the space and 2X the lifting speed.

1 **48% MORE UNDER CAR CLEARANCE**
88" of unobstructed space for easy service of air dams, batteries and more.

2
INTERCHANGEABLE ADAPTER OPTIONS
to service cars, trucks or EVs on the same arm.



TRADITIONAL SMARTLIFT DESIGN

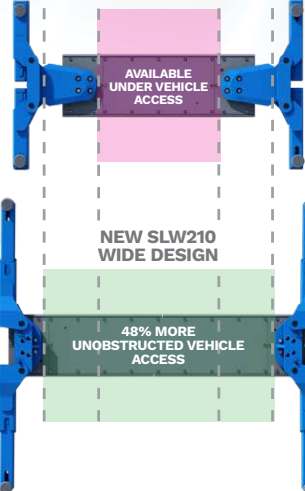

NEW SLW210 WIDE DESIGN

48% MORE UNOBSTRUCTED VEHICLE ACCESS

1
TECHNICIAN PRODUCTIVITY

Obstruction-free design provides the needed 360° movement around vehicles with open access above and below the vehicle.

3
SHOCKWAVE™ TECHNOLOGY

Accelerate service numbers with 2X the lifting speed compared to standard lifts.



Rotary

SMARTER LIFTING... FOR YOUR BUSINESS

2

Discover the Versatility of Patented TRIO™ Arms

Standard TRIO™ two-piece, three-stage arms allow quick positioning of the adapter to the vehicle pickup point with no need to move heavy two or three stage inner arms. Interchangeable with three vehicle adapter options.

3

Supercharge with SHOCKWAVE™ TECHNOLOGY

SHOCKWAVE-equipped lifts are the fast! Every industry exclusive SHOCKWAVE-equipped lift includes:

- 2X faster rise and descent
- Patented 110v DC power system with built-in battery charger
- Spotline™ laser-assisted spotting with motion sensor



LEARN ABOUT THE
BENEFITS OF
SHOCKWAVE LIFTS



PROUDLY MADE IN MADISON, INDIANA

Why SMARTLIFT?

From every angle, we've designed the SmartLift® to help you get the most from your service facility.



WATCH AND
LEARN ABOUT
THE SMARTLIFT
ADVANTAGE

Technicians Are More Productive:

Rotary inground lifts provide 360° movement around the vehicle and unobstructed access above and below the vehicle. Repairs can be performed without danger of damaging the vehicle on lift columns or overheads.

Proven SMARTLIFT Technology: Required Routine Service is Faster and Less Expensive*

- Patented Easy Access™ cylinders allow all routine cylinder maintenance to be done at floor level with no forklifts. **Reduce downtime by 75%** and preserve bay revenue with lower service repair costs.
- Exclusive Smartguard® plungers for time tested durability and performance.
- Corrosion resistant locking system features a patent polymer and stainless air cylinder for high performance and longevity of lift operation.

Environmental Responsibility

Smartlifts are fully contained in a recycled, single-piece polymer composite housing - oil leakage and spillage are a thing of the past. **There are no EPA concerns with this inground lift.**

Easier, Faster Installation

Smartlifts are preassembled and install quickly in a new or existing facility with minimal excavation. Smartlifts require less materials versus other wide stance lifts that need multiple pours, more assembly and longer time to complete installation. **Save up to 35% in installation costs.***

More Up Time, Less Lost Revenue

No other lift brand rigorously life cycle tests its equipment to the same standards as Rotary. Testing validates components, minimizes lift failures and maximizes working time in the bay - matching years of reliable service.

*WHEN COMPARED TO COMPETITIVE DESIGNS

SMARTLIFT® WIDE INGROUND LIFT MODELS

10,000 LBS. CAPACITY LIFTS

Three lift models with 3 adapter options

SLW210-RA

RA Round Polymer Adapters

SLW210-TA


TA Frame-Engaging Truck Adapter

12,000 LBS. CAPACITY LIFTS

Light and medium duty trucks

SLW212-TA

TA Frame-Engaging Truck Adapter

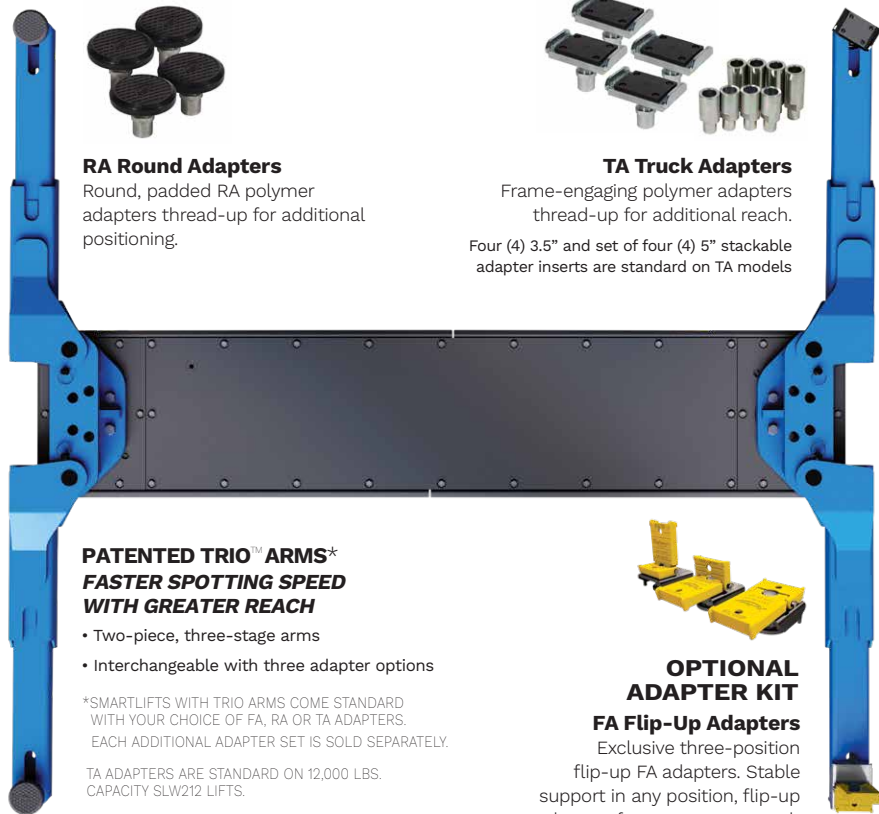

RA Round Adapters

Round, padded RA polymer adapters thread-up for additional positioning.

TA Truck Adapters

Frame-engaging polymer adapters thread-up for additional reach. Four (4) 3.5" and set of four (4) 5" stackable adapter inserts are standard on TA models

PATENTED TRIO™ ARMS* FASTER SPOTTING SPEED WITH GREATER REACH

- Two-piece, three-stage arms
- Interchangeable with three adapter options

*SMARTLIFTS WITH TRIO ARMS COME STANDARD WITH YOUR CHOICE OF FA, RA OR TA ADAPTERS. EACH ADDITIONAL ADAPTER SET IS SOLD SEPARATELY.

TA ADAPTERS ARE STANDARD ON 12,000 LBS. CAPACITY SLW212 LIFTS.



OPTIONAL ADAPTER KIT

FA Flip-Up Adapters

Exclusive three-position flip-up FA adapters. Stable support in any position, flip-up adapters feature great strength in a simple design.

SPECIFICATIONS

SMARTLIFT MODELS

Standard Colors are Blue, Red, Black



SLW210-RA
THREE-STAGE
TRIO ARMS
Round Adapters (RA)



SLW210-TA
THREE-STAGE
TRIO ARMS
Truck Adapters (TA)



SLW212-TA
THREE-STAGE
TRIO ARMS
Truck Adapters (TA)

STANDARD	SLW210iN0GO	SLW210iN0TO	SLW212iN0TO
SHOCKWAVE EQUIPPED	SLW210U0GO	SLW210U0TO	SLW212U0TO
Lift Capacity Capacity per Arm	10,000 lbs. 2,500 lbs.		12,000 lbs. 3,000 lbs.
Rise*/ 71" cylinder stroke	75-3/16" to 76-3/8"	75-1/4" to 76-7/16"	75-9/16" to 76-3/4"
Overall Width	119-5/8"		
Drive-Thru Clearance	88-1/16"		
Minimum Arm Reach	19-11/16"	19-11/16"	21-7/16"
Maximum Arm Reach	44-1/2"	44 -1/2"	47"
Min. Adapter Height from Floor	4-1/4"	4-7/8"	4-7/8"
Ceiling Height Minimum	Required ceiling height equals rise with tallest adapter extensions plus height of vehicle		
Voltage Single Phase	208-230V / 110V with SHOCKWAVE		
Electrical Usage Ø	.01kWh per cycle		
Guide Plunger Diameter	8-1/2"		
Time of Full Rise / Descent With SHOCKWAVE**	53 seconds / 24 seconds 25 seconds / 19 seconds		

* Rise measures lowest and highest position of the supplied adapters from floor to full cylinder stroke.

** Actual rise and descent times vary depending on vehicle weight. Lift colors come standard with your choice of red or blue.



2700 Lanier Drive
Madison, IN 47250, USA

rotarylif.com



Sales: 800.445.5438
insidesales@vsgdover.com

Tech. Support: 800.445.5438
technicalsupport@rotarylif.com

Government Sales: 800.445.5438 X5655
rotarylif.com/Government-Purchasing-Assistance/

Lit# Rotary SLW210/12 Cutsheet.2022.04

©2022 VEHICLE SERVICE GROUP™, Printed in U.S.A., All Rights Reserved. Unless otherwise indicated, ROTARY, VEHICLE SERVICE GROUP™, DOVER and all other trademarks are property of Dover Corporation and its affiliates.

Product specifications, part numbers, images and component descriptions are subject to change without notice or liability.